




# maxit 4610 Industrial Floor

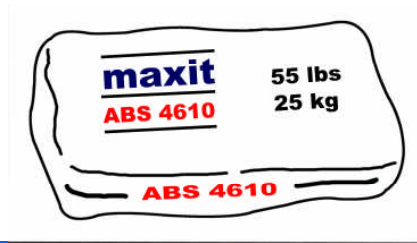

### Product Description:

Maxit ABS 4610 is an Industrial Cement, self leveling floor underlayment. This product is factory blended and it contains all ingredients, including sand.

Maxit ABS 4610 is a very high wear resistant floor covering for industrial buildings like factories and warehouses, that have to be completely level.

**No additional floor covering needed.**

### Mixing:

The product is mixed in a big bucket with a drill, for small repairs, with the automatic mixing pump for bags or with the silo including the silo mixing pump in bulk for large projects.

**Important:** Always control the flow before starting the floor.

### Application:

Prior to installation of the maxit ABS 4610, the height of the floor needs to be marked every 20 ft on the floor with the maxit floor pins.

The floor needs to be clean and primed with the maxit ABS MD 16 primer . After the primer has dried, application of the ABS 4610 can begin. Large open floors should be divided in smaller fields to assure that the maxit ABS 4610 does not dry before the floor is all level. Foot traffic 2-4 hours.

### Manufacturer:

**Maxit, Inc.**

28919 W. Rt. 173  
Antioch, IL 60002

Phone: (847) 395-7110

Fax: (847) 395-7105

Local: (888) SILOMIX

Web Site: [www.maxit-usa.com](http://www.maxit-usa.com)

### Coverage:

When mixed with 1.1 Gallons of water (20%) one 55 lbs bag of maxit yields 33 sq ft at 5mm.

Normal thickness 6-8mm. Maximum 15mm.

### Specifications:

Maxit ABS 4610 Industrial Cement Floor :

Compressive Strength ASTM C 109

Test Results: 7 days 28 days

Flow: 145-160 mm 4930 psi 5148 psi

Shrinkage/ Expansion ASTM C 157:

7 Days 0.07%

14 Days 0.07%

28 Days 0.07%

Flexural Strength ASTM C 78:

1450 psi

Scaling Resistance: 30 Days none

Wear resistance with rolling wheel:

10 times better than concrete

